

HYPERWAY

Suspedend Ceiling

Linear Luminaire body made from extruded aluminium, designed with 62 mm wide light emission and no visible screws with continuous lighting systems. Suspended luminaire with 1500mm cable suspension and with integrated tool-less suspension height adjustment possibility. Option with HPO (High Performance Opal) diffuser for uniform illumiaiton and Macro prismatic PMMA diffuser including special bright diffuser film for homoneneous illumination and reduced UGR with hgih intensity.




Colors Available



System Lumen :	2300 - 2500 lm
System Wattage :	18 W/meter (up), 36 W/meter (down)
DC Current :	500 mA (up), 1000 mA (down)
Efficacy :	85 - 95 lm/W
CCT (K) :	2200K - 6500K
CRI :	> 80 (uplight), > 90 (downlight)
Bining :	3SDCM
Lifetime :	L80/B10 (> 50,000 hrs @ Ta 30°C)
Beam Angle :	Downlight - 86° (opal) - 65° (prismatic) Uplight - 118° (batwin lens upright)
UGR Value	< 19 (downlight)

Driver Specs:

Input :	220 - 240V ~ 50/60 Hz
Integration :	Integrated
Tunable :	Yes
Dimmable :	Yes
Available on Request :	On-Off/ Dali

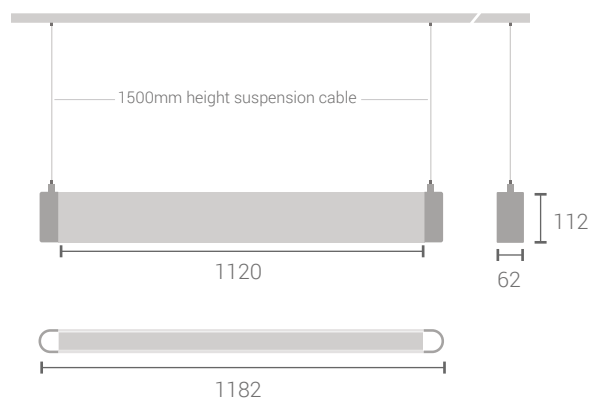

Length Available: 622mm/ 1182mm/ 1742mm/ 2302mm

All dimensions are in mm

For product ordering codes and installation refer to end pages

